EP 6000 V5 - hooklift mobile
YoC: 2009

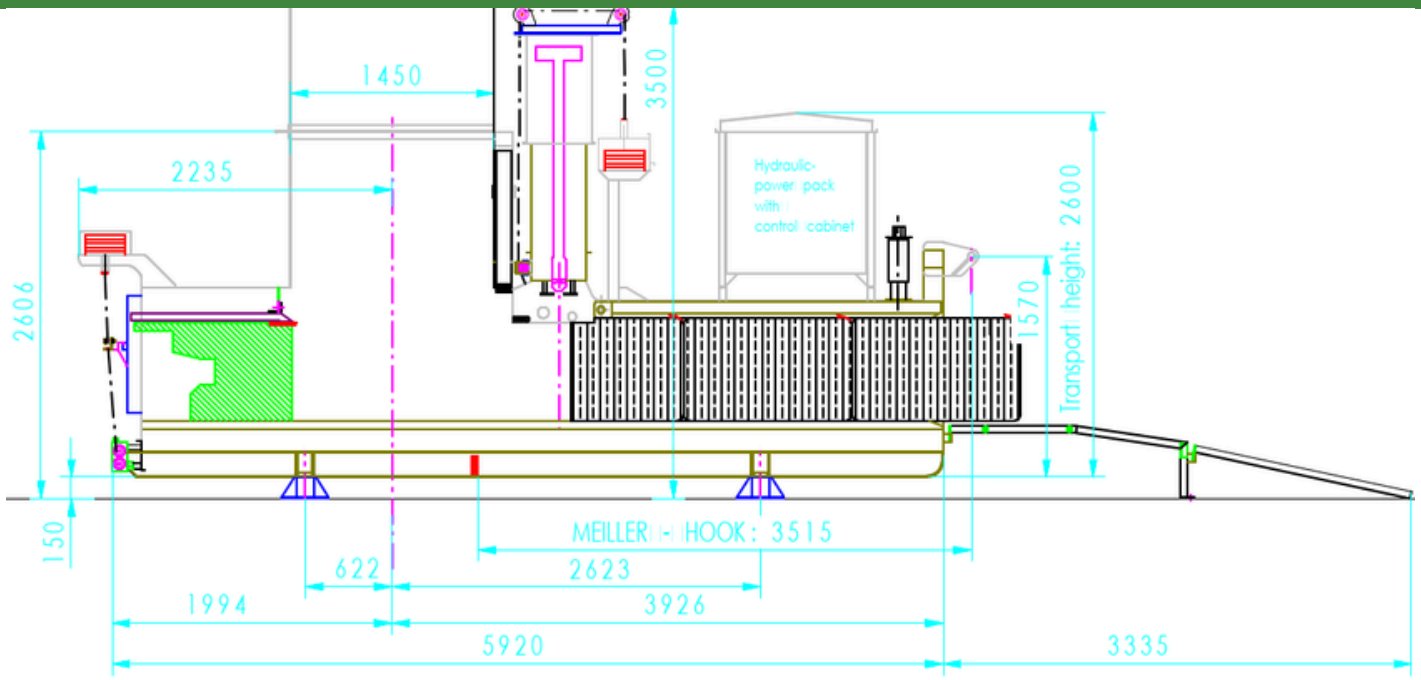

Dimensions and weights:

Total length:	9.255 mm
Height:	3.500 mm
Width:	2.500 mm
Hopper width:	1.440 x 1.100 mm
Bale dimensions:	750 mm x 1.100 mm (length adjustable)
Machine weight:	approx. 14 Tons

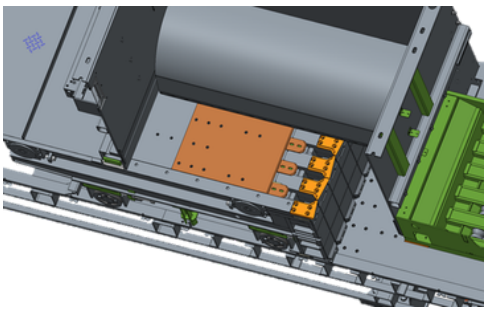

Closing plates (opened)

Performance data:

Pressing force:	60 tons
Drive power:	2 x 22 kW
Bale weight:	250 - 500 KG (depending on the material)
Throughput according to bulk density:	at 30 kg/m³ - ca. 3,0 t/h at 50 kg/m³ - ca. 6,5 t/h at 100 kg/m³ - ca. 9,0 t/h
Tying:	5 fold vertical, wire

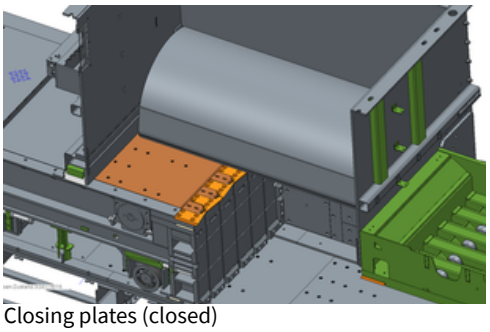

Closing plates (closed)

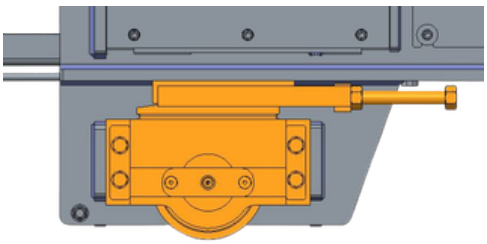

Height-adjustable rollers on the press ram

Equipped with:

- Height-adjustable rollers on the press ram
- Closing plates above and below the ram
- Remote maintenance system
- Wear-resistant guiding rails
- Cutting edge cleaner

EP 6000 V5 - hakenliftmobil
BJ: 2009

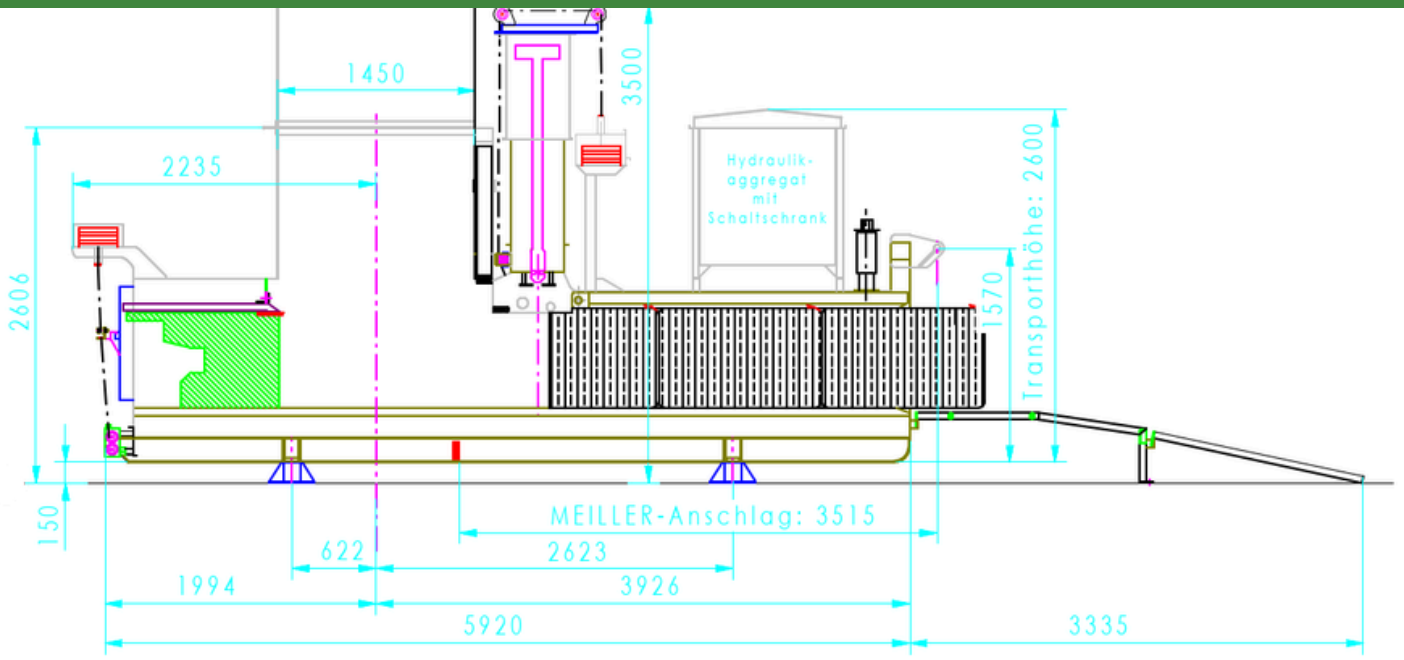

Maße und Gewichte:

Länge:	9.255 mm
Höhe:	3.500mm
Breite:	2.500 mm
Trichterbreite:	1.440 x 1.100 mm
Ballenabmessungen:	750 mm x 1.100 mm (Länge einstellbar)
Maschinengewicht:	ca. 14 Tonnen

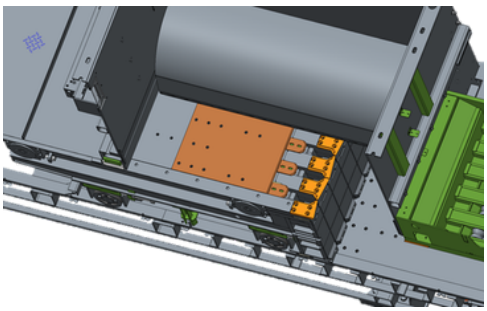

Kolbenschieber (geöffnet)

Leistungsdaten:

Presskraft:	60 Tonnen
Antriebsleistung:	2 x 22 kW
Ballengewicht:	250 - 500 KG (abhängig vom Material)
Durchsatz in Abhängigkeit der Schüttdichte:	at 30 kg/m³ - ca. 3,0 t/h at 50 kg/m³ - ca. 6,5 t/h at 100 kg/m³ - ca. 9,0 t/h
Abbindung:	5-fach vertikal, Draht

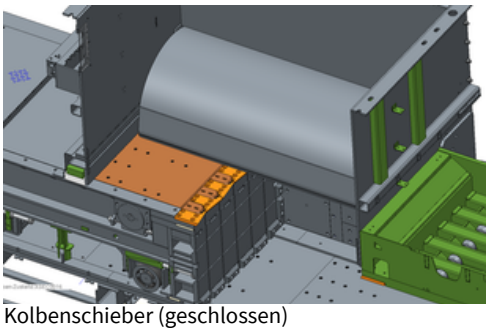

Kolbenschieber (geschlossen)

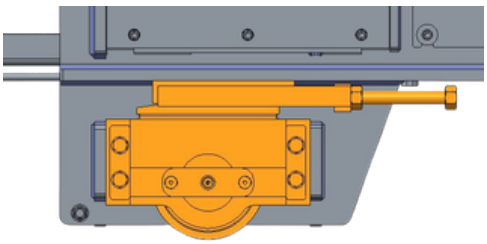

Höhenverstellbare Laufrollen am Pressschild

Ausgestattet mit:

- Höhenverstellbare Laufrollen am Pressschild
- Kolben-Boden-Schieber
- Fernwartung
- MEILLER-Hakenaufnahme
- Schneidkantenfreistampfer